


# 19 INCH LCD MONITOR



19" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel. Samsung TN (Twisted Nematic) mode produces great images.

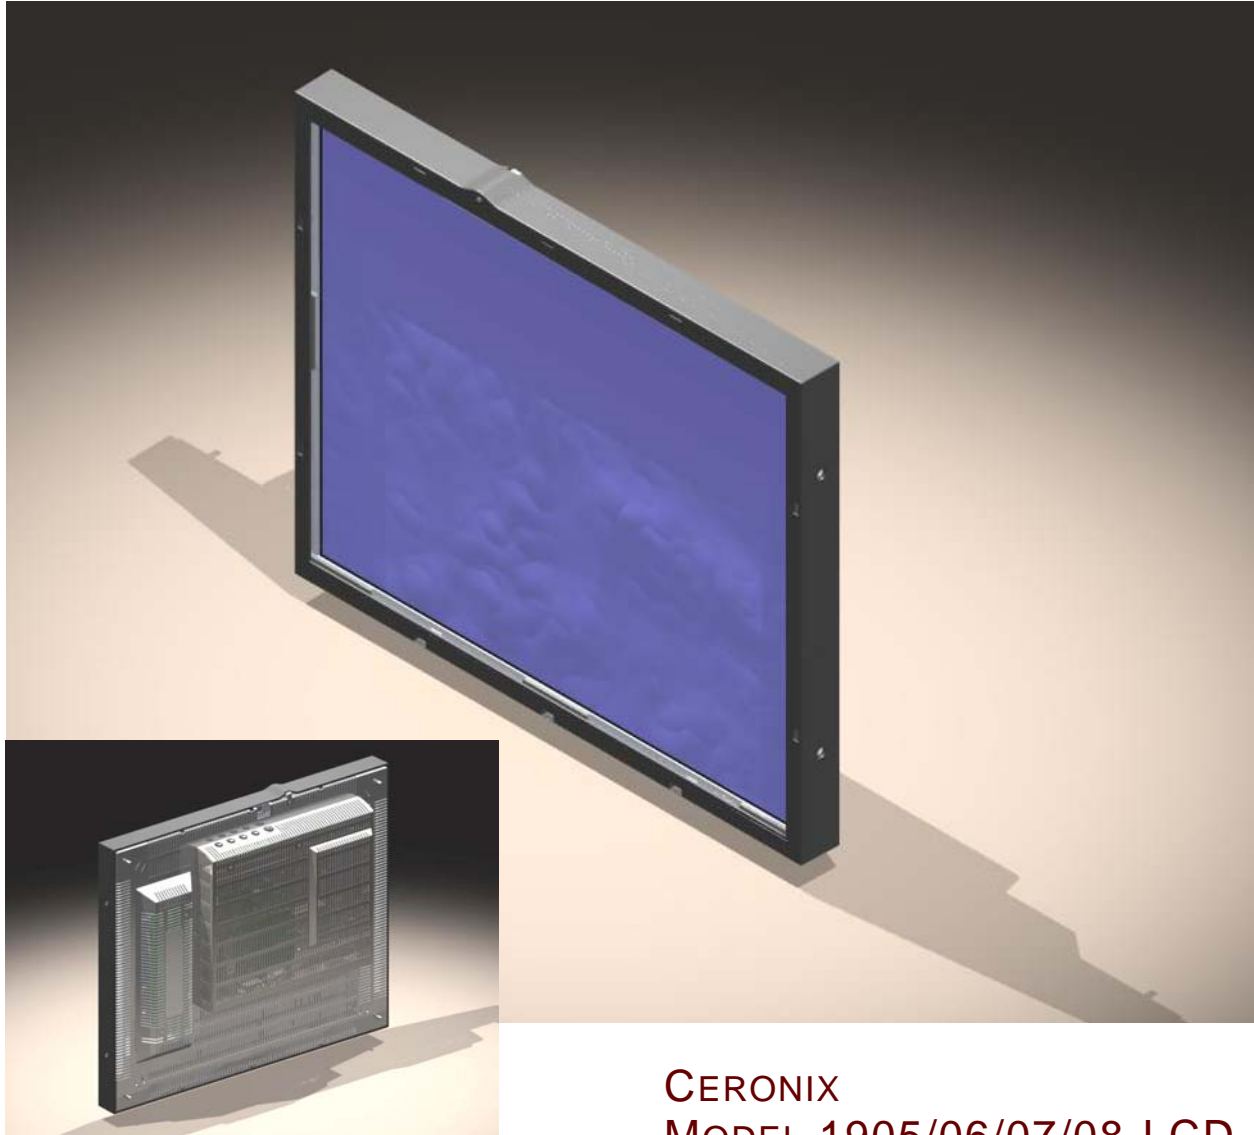

## CERONIX

13350 NEW AIRPORT ROAD  
AUBURN, CA 95602  
P 530.886.6400  
F 530.888.1065  
WWW.CERONIX.COM

## CERONIX MODEL 1905/06/07/08-LCD

- 1280 x 1024 Native Resolution
- Wide Viewing Angle (160° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 250 nits (cd/m<sup>2</sup>)
- 1000:1 Contrast Ratio
- 16.7 Million Colors
- 19" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation (12/24VDC Optional)
- Operational in 70° C Environments



**CERONIX**

**MODEL 1905/06/07/08-LCD - 19 INCH**

Specifications	
Panel	a-si TFT Active Matrix, TN (Twisted Nematic)
Viewable Size	19"
Native Resolution	1280 x 1024
Aspect Ratio	5:4
Pixel Size (mm)	0.294(H) x 0.294(W)
Brightness (Typical)	250 cd/m <sup>2</sup>
Contrast Ratio	1000:1
Response Time (Sum of Tr, Tf)	5mS
Colors Supported	16.7 Million
Viewing Angle	160° in Horizontal and Vertical Directions
Interface	Analog & Digital
Input Connectors	RGB 15-Pin D-Sub, DVI-D
Frequency	31.5-80KHz Horizontal, 56-75Hz Vertical
Power Consumption	40 Watts, 90 - 264VAC, 50/60Hz
Dimensions (W x H x D)	15.968" x 13.173" x 2.805"
Environment	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing
Agency Certifications	<p>Intertek :            Conforms to ANSI/UL STD. 60950-1, Certified to CAN/CSA STD. C22.22 No. 60950-1-03 (Registration Number: 3191746)</p> <p>TUV:            Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)</p>

