


20 INCH LCD MONITOR

WIDE FORMAT (16:9)



20" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel. Samsung PVA (Patterned Vertical Alignment) mode has wide view and produces great images.

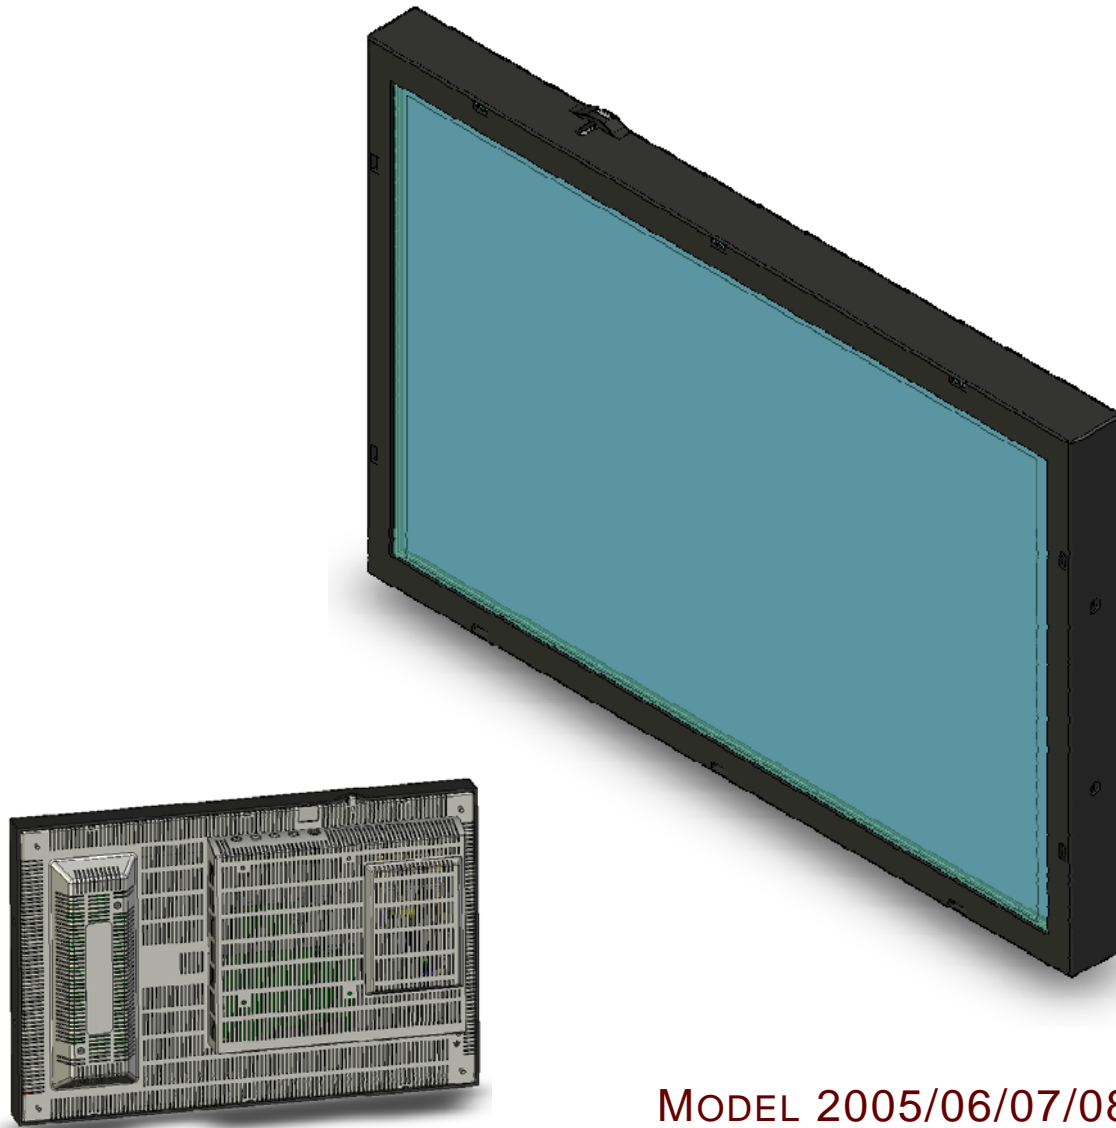

CERONIX

13350 NEW AIRPORT ROAD
AUBURN, CA 95602
P 530.886.6400
F 530.888.1065
WWW.CERONIX.COM

MODEL 2005/06/07/08LCD 20 INCH LCD

- 1600 x 900 Native Resolution
- Wide Viewing Angle (178° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 250 nits (cd/m²)
- 3000:1 Contrast Ratio
- 16.7 Million Colors
- 20" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation (5/12/24VDC Optional)
- Operational in 70° C Environments



CERONIX

MODEL 2005/06/07/08LCD 20 INCH

Specifications	
Panel	a-si TFT Active Matrix, PVA (Patterned Vertical Alignment) Mode
Viewable Size	20"
Native Resolution	1600 x 900
Aspect Ratio	16:9
Pixel Size (mm)	0.2768(H) x 0.2768(W)
Brightness (Typical)	250 cd/m ²
Contrast Ratio	3000:1
Response Time (Sum of Tr, Tf)	25mS
Colors Supported	16.7 Million
Viewing Angle	178° in Horizontal and Vertical Directions
Interface	Analog & Digital
Input Connectors	RGB 15-Pin D-Sub, DVI-D
Frequency	31.5-80KHz Horizontal, 56-75Hz Vertical
Power Consumption	35 Watts, 90 - 264VAC, 50/60Hz, 5/12/24VDC Optional
Dimensions (W x H x D)	18.597" x 11.123" x 2.787"
Environment	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing
Agency Certifications	<p>Intertek : Conforms to ANSI/UL STD. 60950-1, Certified to CAN/CSA STD. C22.22 No. 60950-1-03 (Registration Number: 3191746)</p> <p>TUV: Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)</p>

