


22 INCH LCD MONITOR

WIDE FORMAT (16:10)

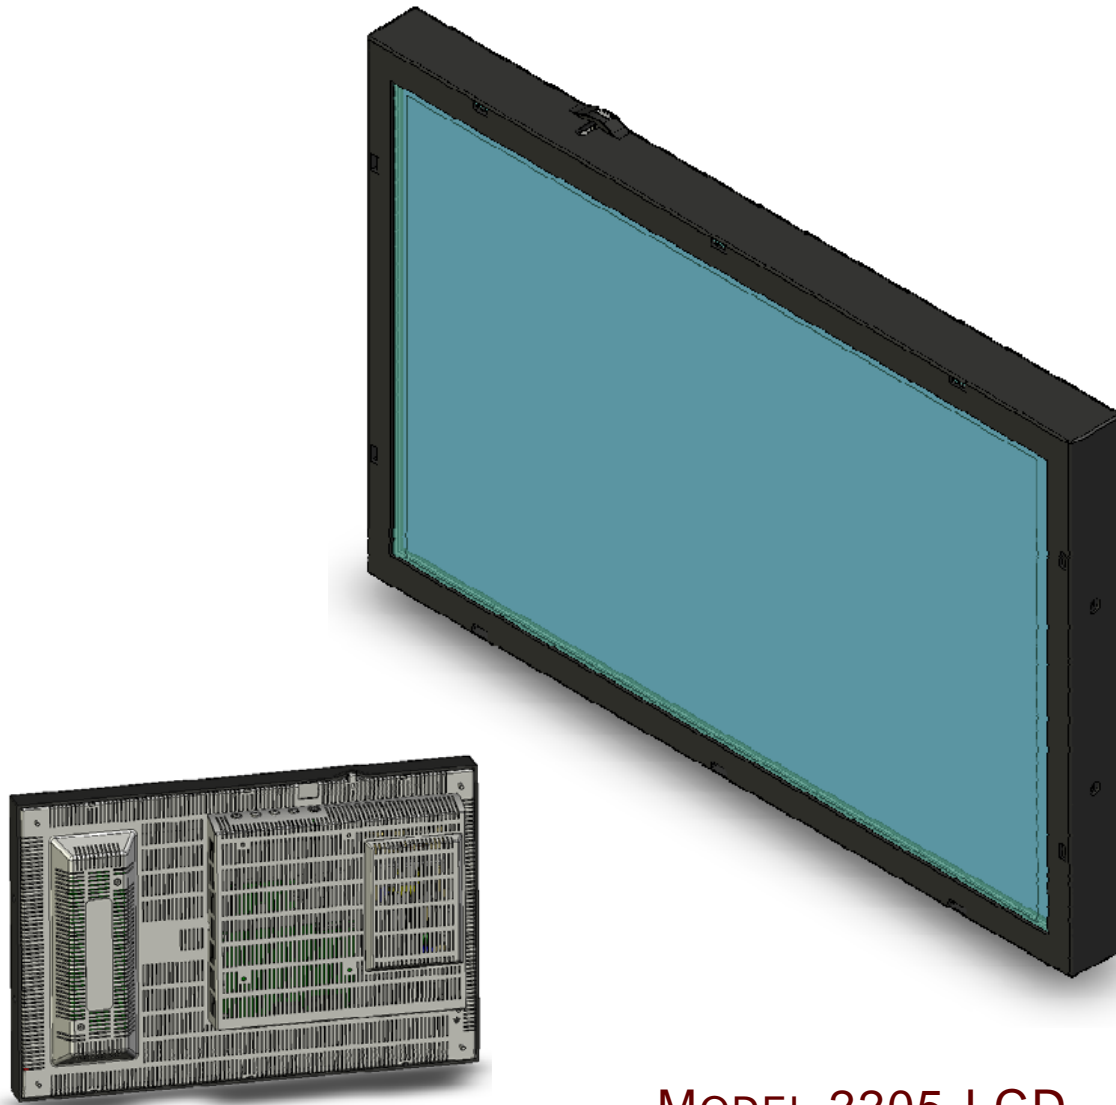

22" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel.

MODEL 2205-LCD 22 INCH LCD

- 1680 x 1050 Native Resolution
- Viewing Angle (160° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 175 nits (cd/m²)
- 1000:1 Contrast Ratio
- 16.7 Million Colors
- 22" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation
- Operational in 70° C Environments



CERONIX

13350 NEW AIRPORT ROAD
AUBURN, CA 95602
P 530.886.6400
F 530.888.1065
WWW.CERONIX.COM

Specifications	
Panel	a-si TFT Active Matrix, TN (Twisted Nematic) Mode
Viewable Size	22"
Native Resolution	1680 x 1050
Aspect Ratio	16:10
Pixel Size (mm)	0.282(H) x 0.282(W)
Brightness (Typical)	175 cd/m ²
Contrast Ratio	1000:1
Response Time (Sum of Tr, Tf)	13mS
Colors Supported	16.7 Million
Viewing Angle	160° in Horizontal and Vertical Directions
Interface	Analog & Digital
Input Connectors	RGB 15-Pin D-Sub, DVI-D
Frequency	31.5-80KHz Horizontal, 56-75Hz Vertical
Power Consumption	40 Watts, 90 - 264VAC, 50/60Hz
Dimensions (W x H x D)	19.815" x 13.020" x 2.806"
Environment	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing
Agency Certifications	<p>Intertek : Conforms to ANSI/UL STD. 60950-1, Certified to CAN/CSA STD. C22.22 No. 60950-1-03 (Registration Number: 3191746)</p> <p>TUV: Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)</p>

