


26 INCH LCD MONITOR

WIDE FORMAT (16:9)



26" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel. Samsung SPVA (Super Patterned Vertical Alignment) mode has wide view and produces great images.

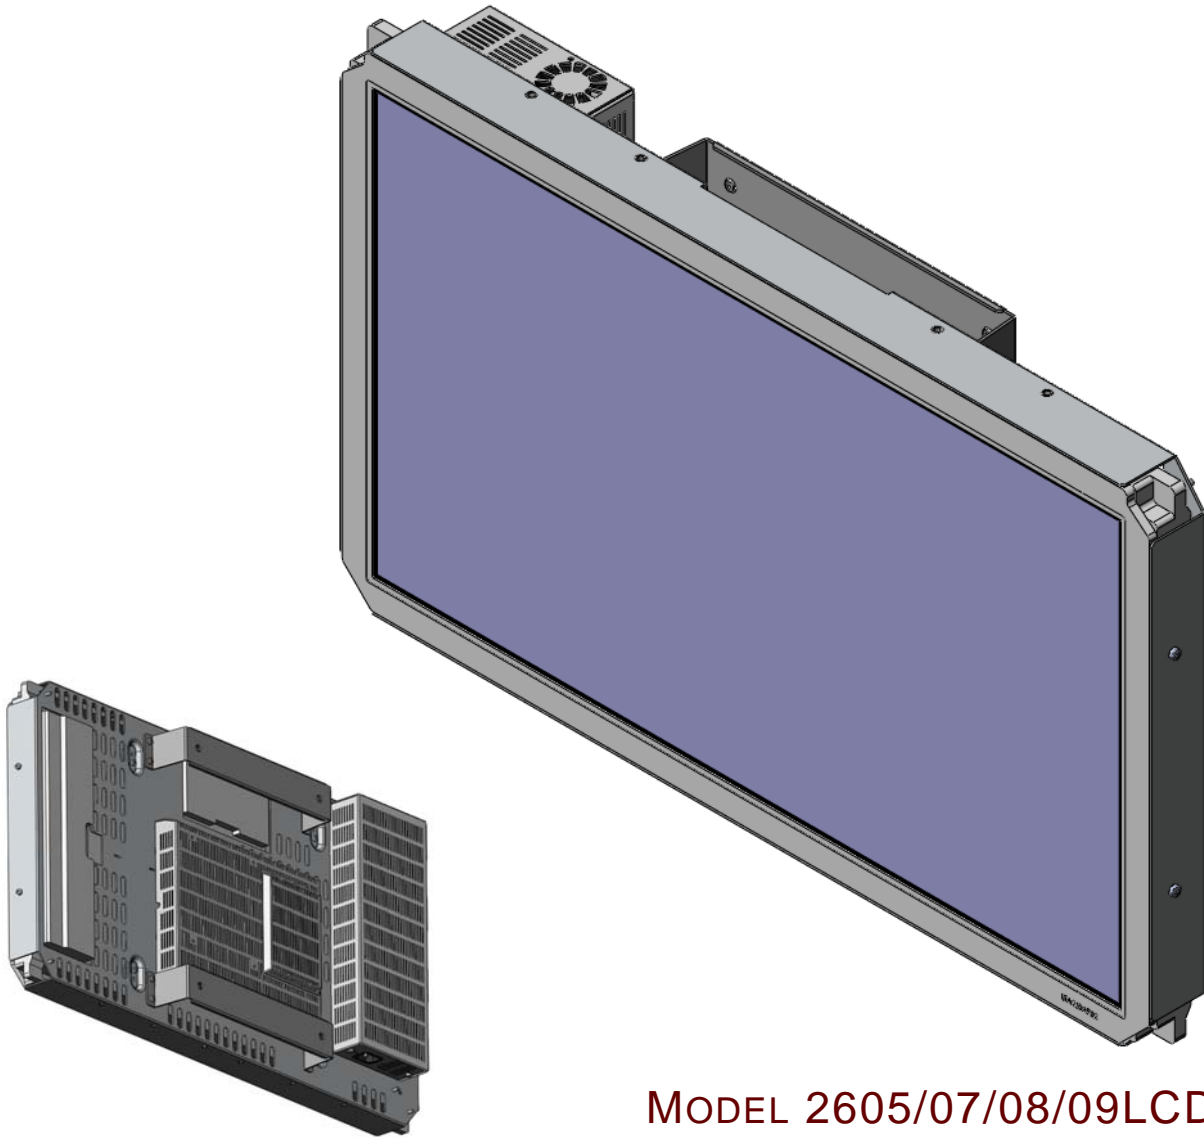

CERONIX

13350 NEW AIRPORT ROAD
AUBURN, CA 95602
P 530.886.6400
F 530.888.1065
WWW.CERONIX.COM


MODEL 2605/07/08/09LCD 26 INCH LCD

- 1366 x 768 Native Resolution
- Wide Viewing Angle (178° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 450 nits (cd/m²)
- 5000:1 Contrast Ratio
- 16.7 Million Colors
- 26" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation (5/12/24VDC Optional)
- Operational in 70° C Environments
- Rear/Side mount brackets and hardware available



CERONIX

MODEL 2605/07/08/09LCD 26 INCH

Specifications	
Panel	a-si TFT Active Matrix, SPVA (Super Patterned Vertical Alignment) Mode
Viewable Size	26"
Native Resolution	1366 x 768
Aspect Ratio	16:9
Pixel Size (mm)	0.4215(H) x 0.4215(W)
Brightness (Typical)	450 cd/m ²
Contrast Ratio	3000:1
Response Time (Sum of Tr, Tf)	16mS
Colors Supported	16.7 Million
Viewing Angle	178° in Horizontal and Vertical Directions
Interface	Analog & Digital
Input Connectors	RGB 15-Pin D-Sub, DVI-D
Frequency	31.5-80KHz Horizontal, 56-75Hz Vertical
Power Consumption	75 Watts, 90 - 264VAC, 50/60Hz, 5/12/24VDC Optional
Dimensions (W x H x D)	629.564mm(24.786") x 376.771mm(14.834") x 85.046mm(3.348")
Environment	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing
Agency Certifications	 <p>TUV: Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)</p>

