
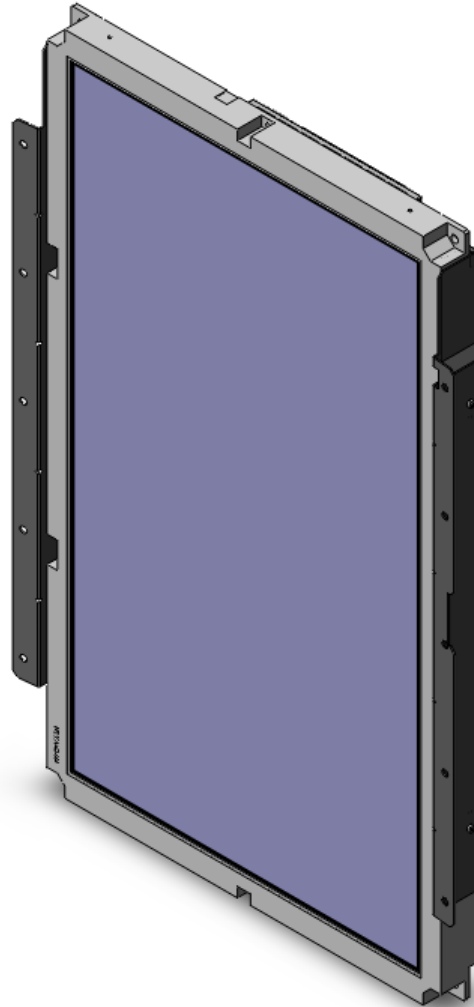


32 INCH LCD MONITOR

WIDE FORMAT (16:9)

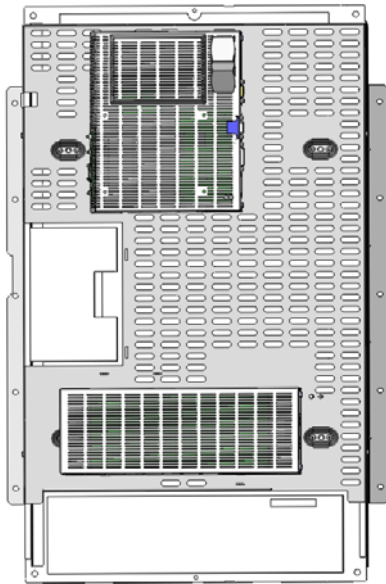

32" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel. Samsung SPVA (Super Patterned Vertical Alignment) mode has wide view and produces great images.

MODEL 3205LCD 32 INCH LCD

- 1366 x 768 Native Resolution
- Wide Viewing Angle (178° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 500 nits (cd/m²)
- 4000:1 Contrast Ratio
- 16.7 Million Colors
- 32" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation
- Operational in 70° C Environments
- Side mounting flanges for easy attachment to system



CERONIX


13350 NEW AIRPORT ROAD
AUBURN, CA 95602
P 530.886.6400
F 530.888.1065
WWW.CERONIX.COM



CERONIX

MODEL 3205LCD

32 INCH LCD

Specifications	
Panel	a-si TFT Active Matrix, SPVA (Super Patterned Vertical Alignment) Mode
Viewable Size	32"
Native Resolution	1366 x 768
Aspect Ratio	16:9
Pixel Size (mm)	0.51075(H) x 0.51075(W)
Brightness (Typical)	500 cd/m ²
Contrast Ratio	4000:1
Response Time (Sum of Tr, Tf)	16mS
Colors Supported	16.7 Million
Viewing Angle	178° in Horizontal and Vertical Directions
Interface	Analog & Digital
Input Connectors	RGB 15-Pin D-Sub, DVI-D
Frequency	31.5-80KHz Horizontal, 56-75Hz Vertical
Power Consumption	180 Watts, 90 - 264VAC, 50/60Hz
Dimensions (W x H x D)	759.994mm(29.921") x 503.835mm(19.836") x 97.866mm(3.853")
Environment	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing
Agency Certifications	 TUV: Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)

