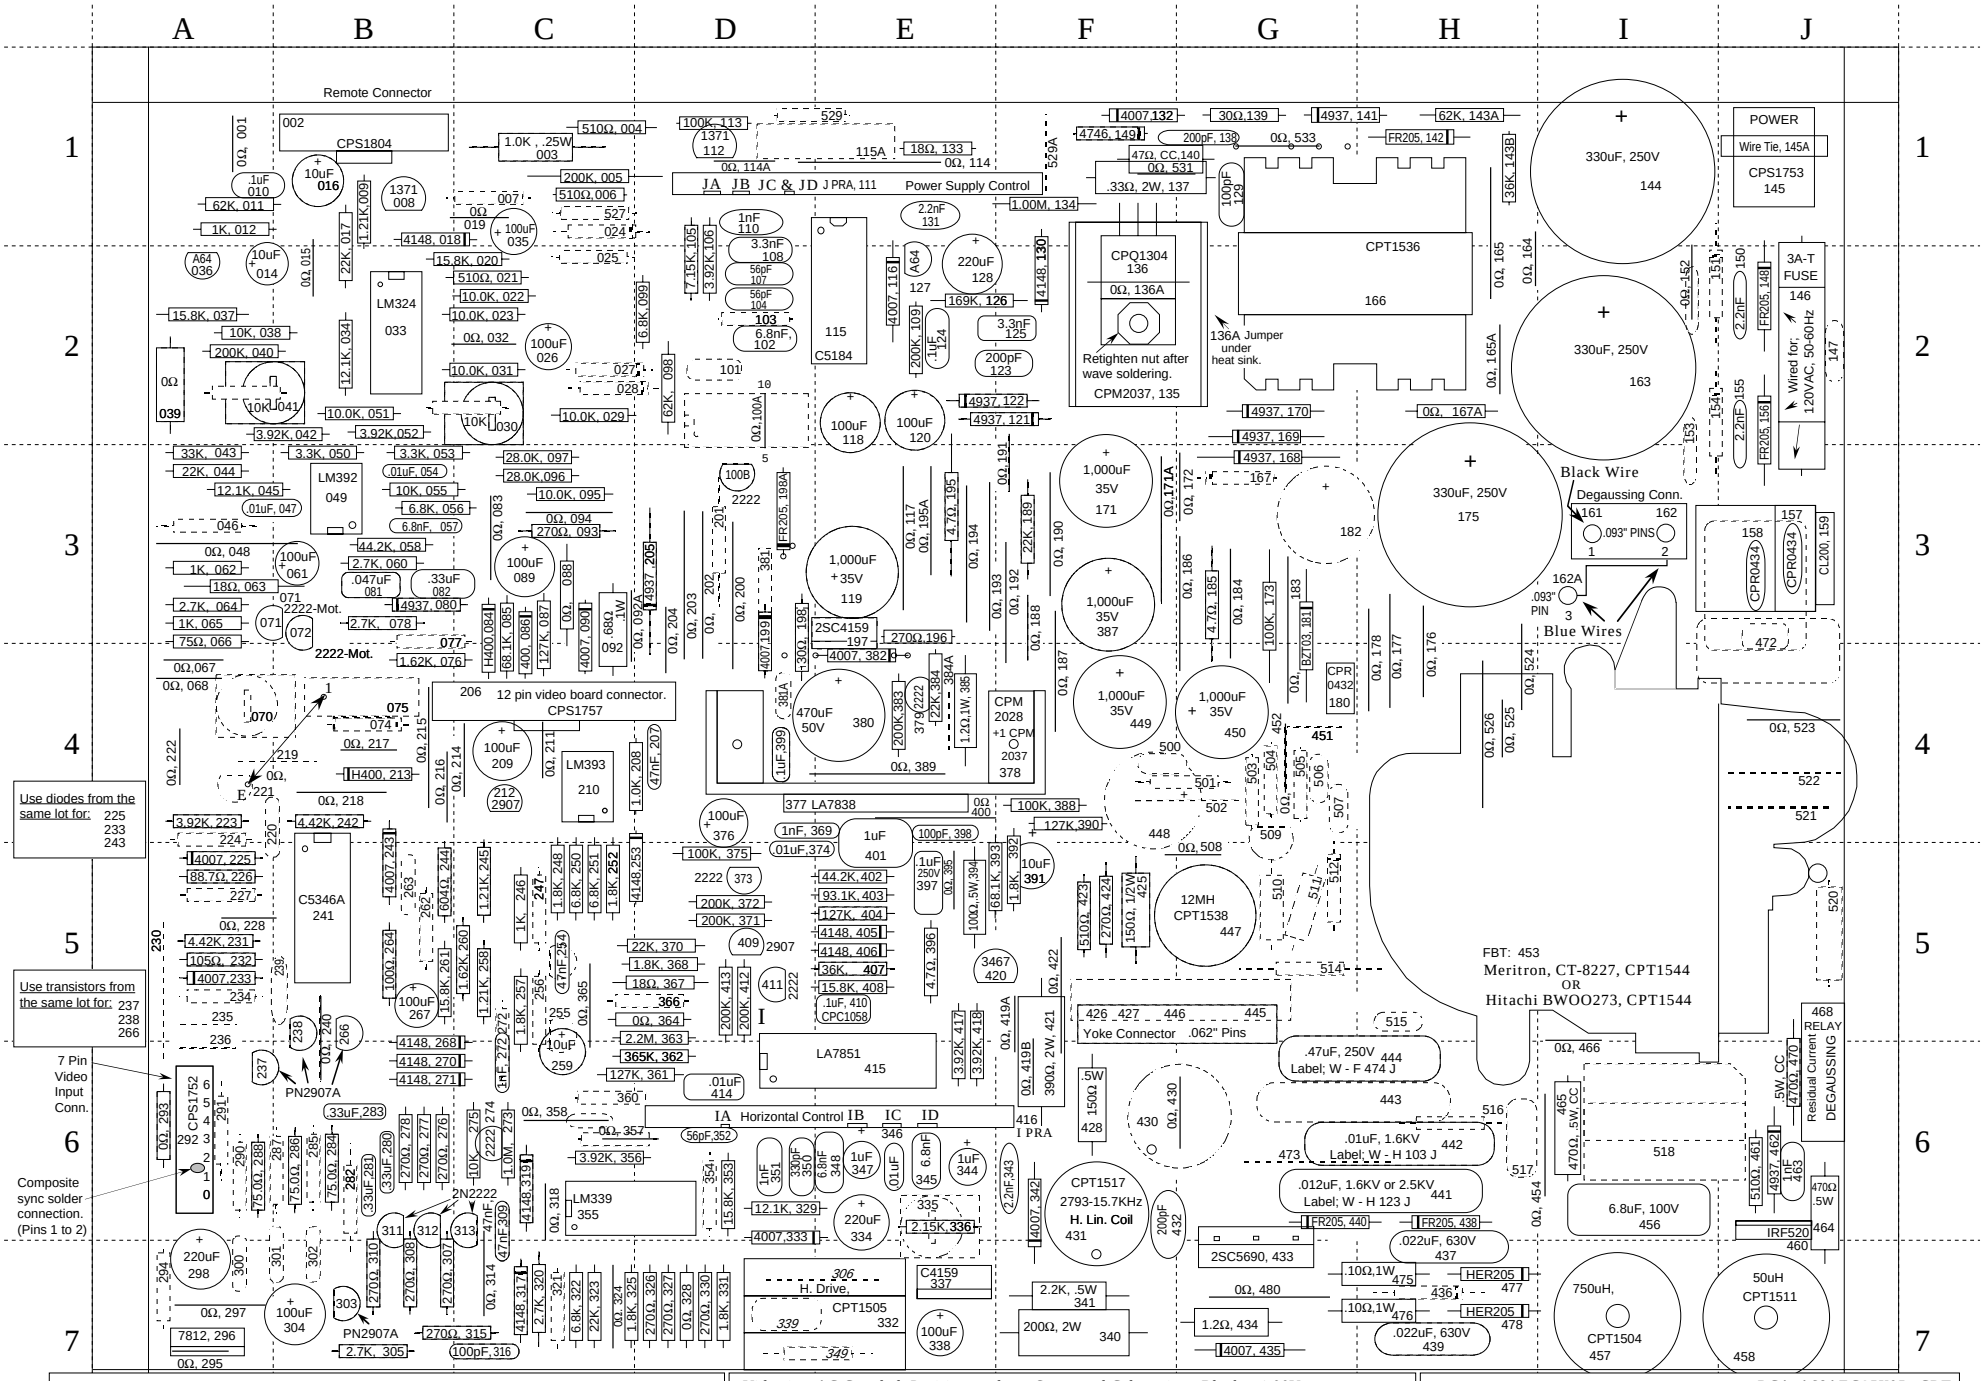

Video PCB: CPA4109

FBT Screen Voltage; 453

4.0V to 4.4 V measured at 920 Pin 8.

NOTE: USE SUPPORT BRACKETS
CPM 2025 - (REAR)
CPM 2024 - (FRONT)
CPM 2026 - (RIGHT)
CPM 2029 - (LEFT)

Video is: AC Coupled, Positive analog, Saturated Color minus Black = 1.00V
Sync is: Composite, –Horizontal and ±Vertical.
Solder connections are; I, IC, JC, SL, S2, pins 1 to 2 on the video input connector 292 .
I PRA (IB, IC, & ID) for Hfo=15.7KHz ±200Hz
J PRA (JA, JB, JC, & JD) for V+=126V to 128V.
V is adjusted for 60 Hz vertical.

CERONIX CPA4104.
Model 2793-15AC
Date; 05/31/02 Rev. E8

RCA A68AEG25X05 CRT.
Power: 120VAC