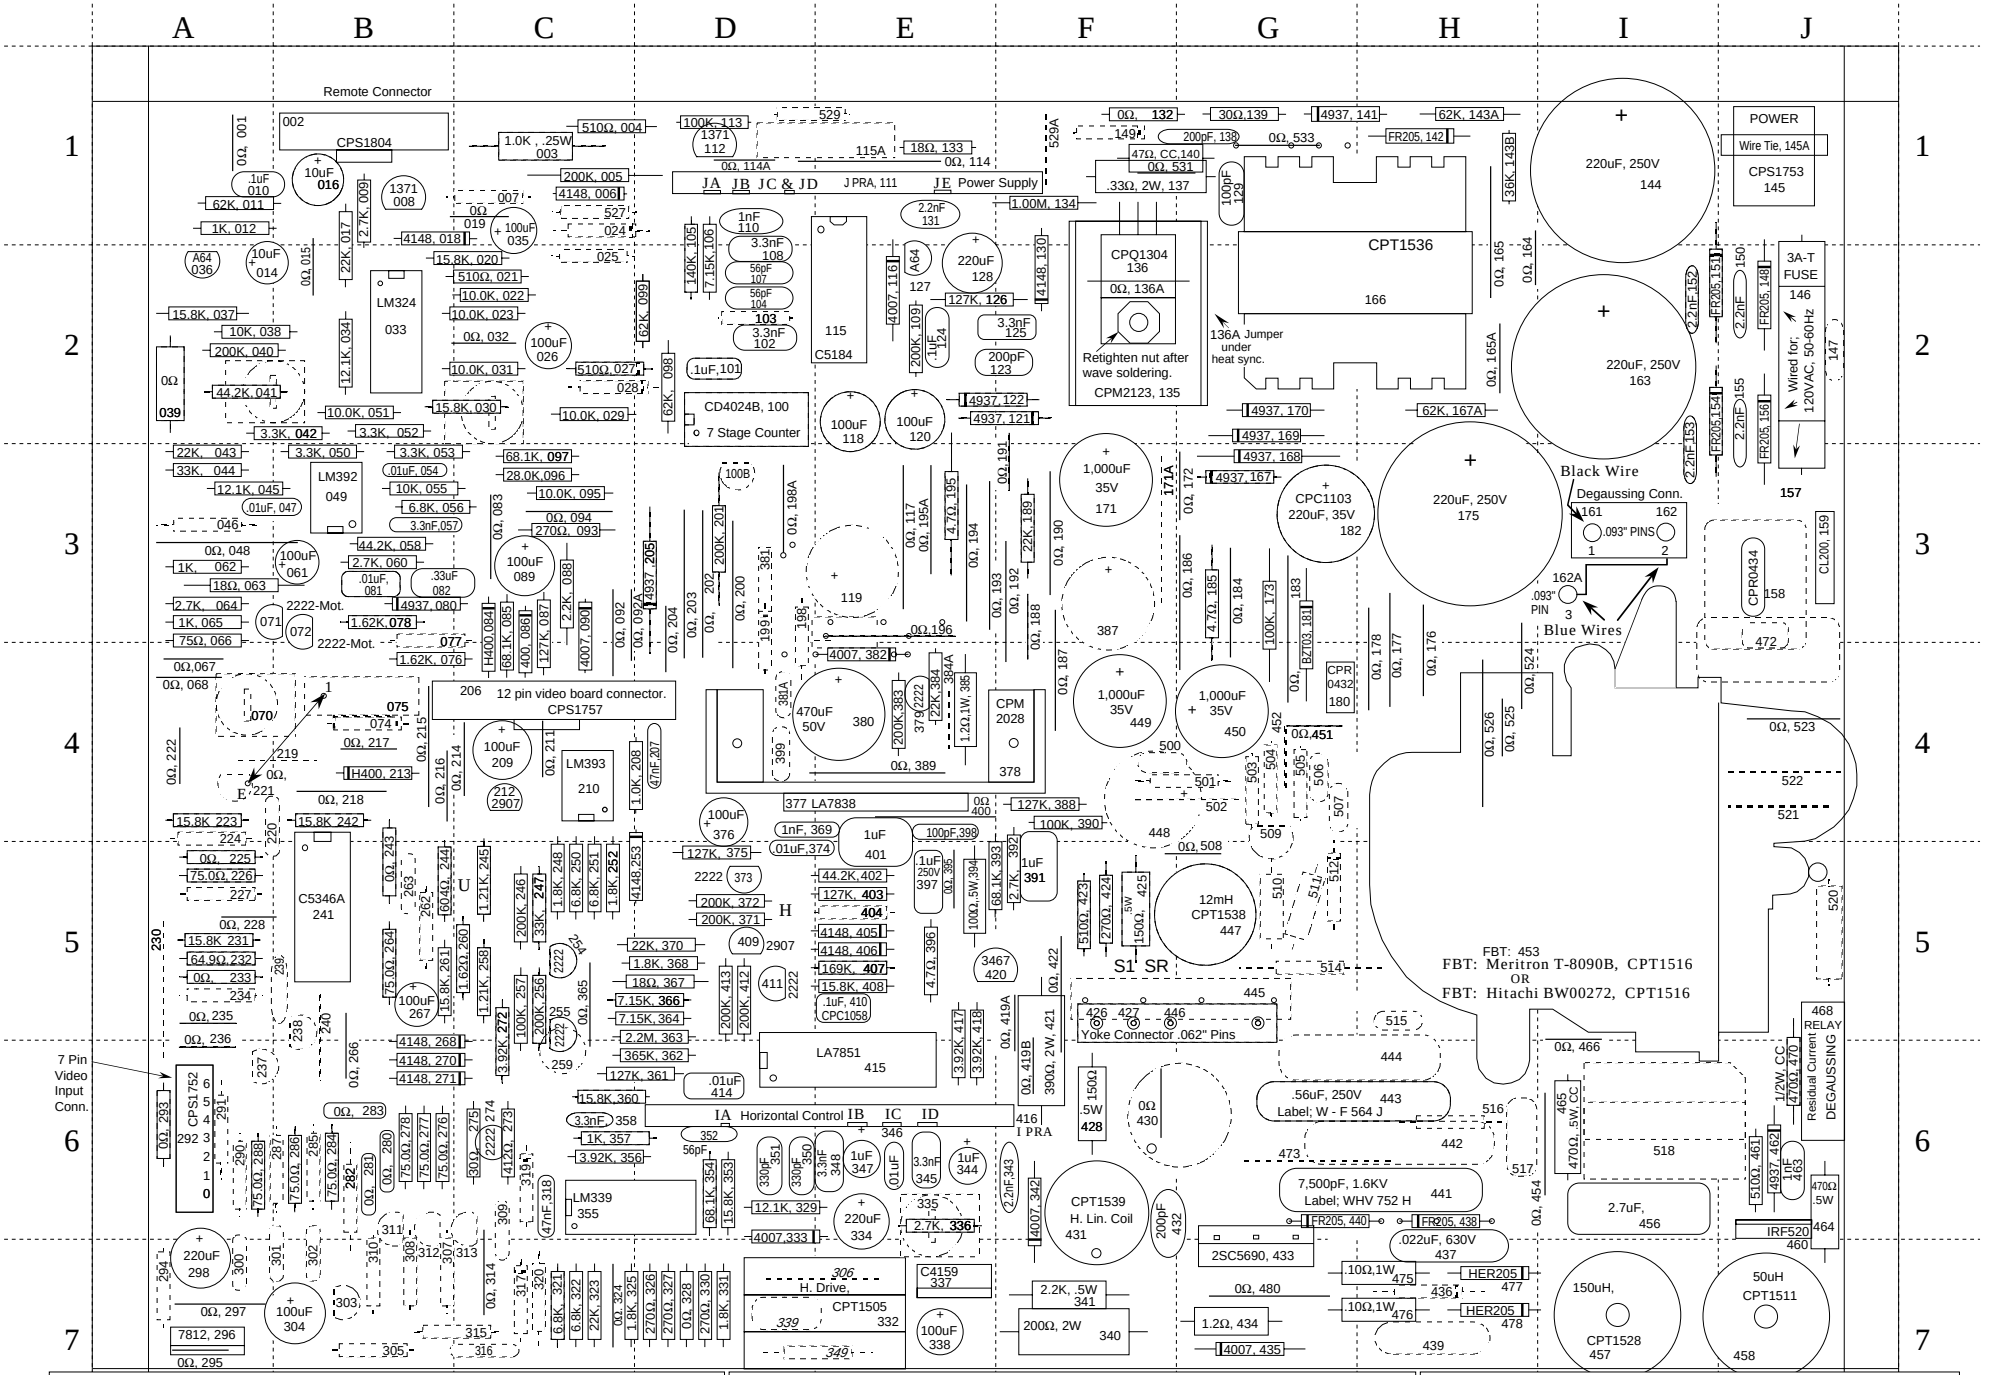

Video PCB: CPA4264

FBT Screen Voltage; 453

4.0V to 4.4 V measured at 920 Pin 8.

NOTE: USE SUPPORT BRACKETS
CPM 2060 - (REAR)
CPM 2024 - (FRONT)
CPM 2026 - (RIGHT)
CPM 2029 - (LEFT)

Video is: Positive analog, Black = 0.00V, Saturated Color = 0.70V
Sync is: Separate, +Horizontal and ±Vertical.
Solder connections are; IA, ID, H, U, SR, S1.
Vertical frequency is 60 Hz.

I PRA (IB, IC, & ID) set for Hfo=31.5KHz ±350Hz
J PRA (JA, JB, JC, & JD) set for V+=106V to 108V.

CERONIX CPA4108
Model 2093-31TV
Date; 05/31/02
Rev. E8

RCA A48AAB37X03 CRT.
Power: 230VAC